


2,8m Ethernet cable

This 2,8m Cat.6A Ethernet cable is designed to interface our gateways.

Picture



Wiring

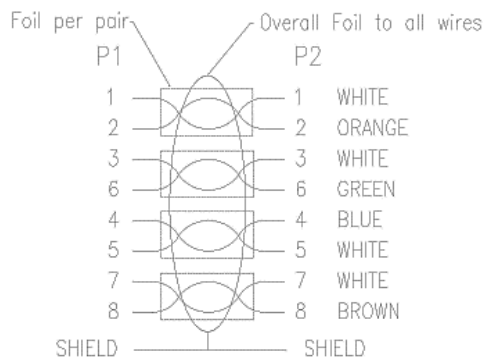

Specifications

Length	2.8m
Category	Cat.6A / FFTP (F/FTP)
Wire gauge	26 AWG
4 twisted pair	Foil per pair / Overall foil to all wires
Color – Resin	White
Wire/Cable Type	PVC
Shielded	Yes
Conductor resistance at 20°C	139.76Ω/Km max
26AWG x 4P Color	P1 Blue/White Blue P2 Orange/White Orange P3 Green/White Green P4 Brown/White Brown
Compliance	UL/c(UL), RoHS

Document Version:


v0.1

Updated:




September the 20th

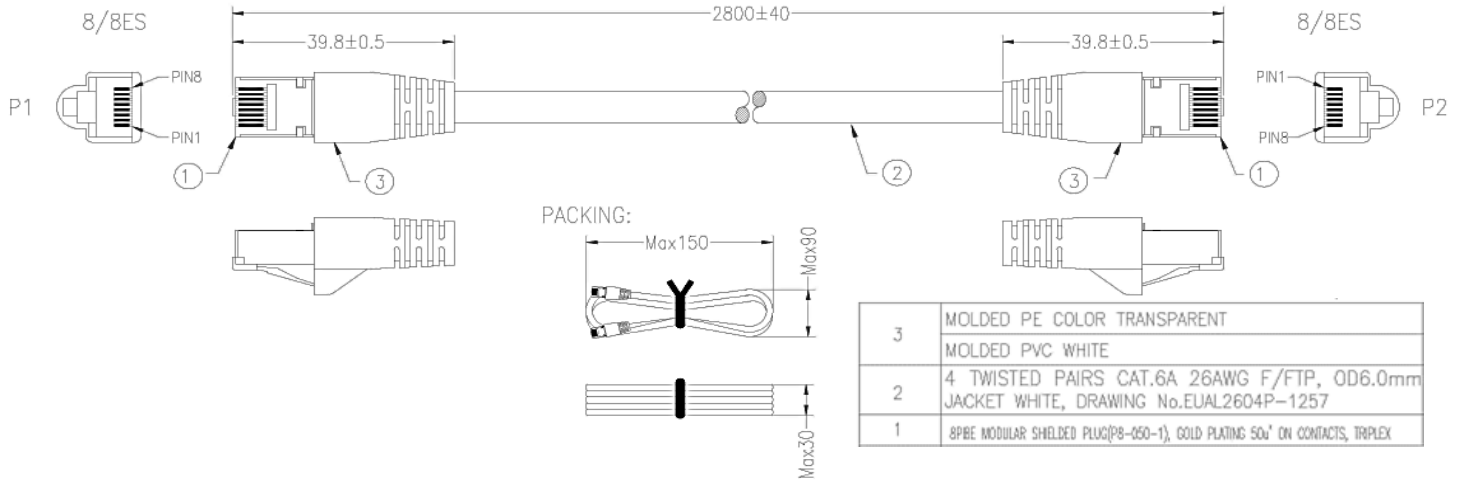

- Responsibility for the information and views set out in this document lies entirely with the manufacturer. Kerlink can't be held responsible for the exactness of information contained therein.
- Accessories are not covered by the maintenance nor warranty extension offers.
- The standard, legal manufacturer's warranty is 1 year.

Mechanical characteristics



Kerlink's Products compatibility

	Wirnet IBTS	✓
	Wirnet IBTS Compact	✓
	Wirnet 64 Highway	✓

Kerlink's Products compatibility		
	Wirnet Station	✓
	Wirnet iStation	✓
	iFemtoCell / iFemtoCell-Evo	✓
	iZeptoCell	✓