


2,8m USB A extension cable

This flexible USB extension cable is a male to female, 2.8m length designed to interface an AC/DC supply or an USB 2.0 device.

Picture



Wiring

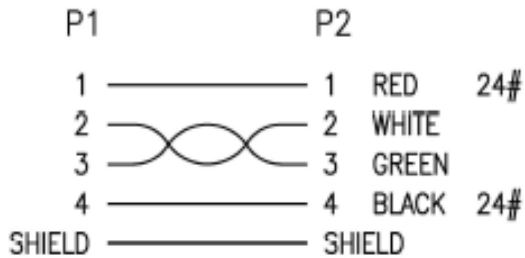


Specifications

Gender	Male-Female
Connector 1	USB-A Male
Connector 2	USB-A Female
Standard	USB 2.0
Cable Length	2.8 m
Color – Resin	White
Lock to Mating Part	Yes
Wire/Cable Type	TPE UL 21104
Operating temperature	0 °C to +50 °C
Storage temperature	-20 °C to +60 °C
Current – Maximum per Contact (VBUS, GND)	1.5A
Current – Maximum per other contacts	0.25A
Shielded	Yes
Voltage – Maximum	30V DC
Dielectric Withstanding Voltage	100V AC, 1mn
Low Level Contact Resistance (LLCR) – Maximum	50 mOhms
D+/D- Pair Differential Impedance	75 ohms min / 105 ohms max
D+/D- Pair Propagation Delay – Maximum	20 ns
Insertion Force	35 N maximum
Extraction Force	10 N min
Durability or Insertion/Extraction Cycles	1500 cycles min

Document Version: v0.1
Updated: September the 20th

- Responsibility for the information and views set out in this document lies entirely with the manufacturer. Kerlink can't be held responsible for the exactness of information contained therein.
- Accessories are not covered by the maintenance nor warranty extension offers.
- The standard, legal manufacturer's warranty is 1 year.

Mechanical characteristics

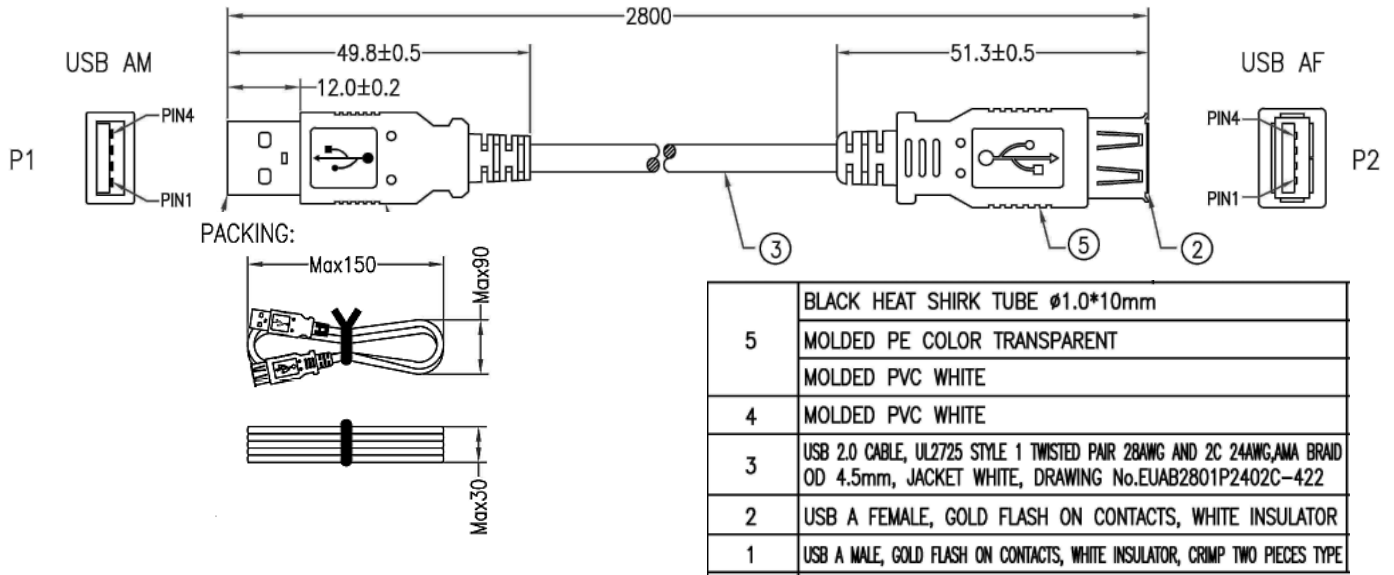

Kerlink's Products compatibility

	<p>iFemtoCell / iFemtoCell-Evo</p>	<p>✓</p>
	<p>iZeptoCell</p>	<p>✓</p>